COMBOLIGHT® COMBO CLASSIC RECESSED

LAMP GROUP 3 - CONFIGURATION "I"

ONE (1) Halogen or Metal Halide lamp - ONE (1) Fluorescent lamp

New Construction Recessed Housing - Trim or Trimless

Catalog # _____

Type _____

Project _____

DESCRIPTION:
An adjustable recessed fixture suitable for multiple downlighting applications with one point of electrical entry. Mixes the use of metal halide lamps with fluorescent lamps. Powder coat finish on housing & lamp assembly.

CONSTRUCTION:
Housing, Plaster Frame & Trim Assembly: 18 gauge CRS. J-Box Assembly: 16 gauge CRS (galvanized). Fixture is offered with a .75" ceiling trim or as a trimless fixture. Can accommodate 0.50" to 1.00" ceiling thickness.

LAMP ASSEMBLY:
One Halogen or Metal Halide lamp cell with one fluorescent lamp cell. Can accept up to two optical accessories. 380º x 45º locking lamp adjustment. Provides 45º visual cut-off.

SYSTEM PROTECTION:
Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:
Fixture is two circuit.
Circuit 1: Integral Aromat® electronic metal halide ballasts for metal halide lamps. Halogen lamps are line voltage.

Circuit 2: Integral electronic ballasts for fluorescent lamps. **Lutron® dimming ballasts available upon request.**

Junction box is UL listed for through branch wiring, for 8 #12, 90°C supply conductors or 60°C for end of run (access above ceiling not required).

Made in the USA.

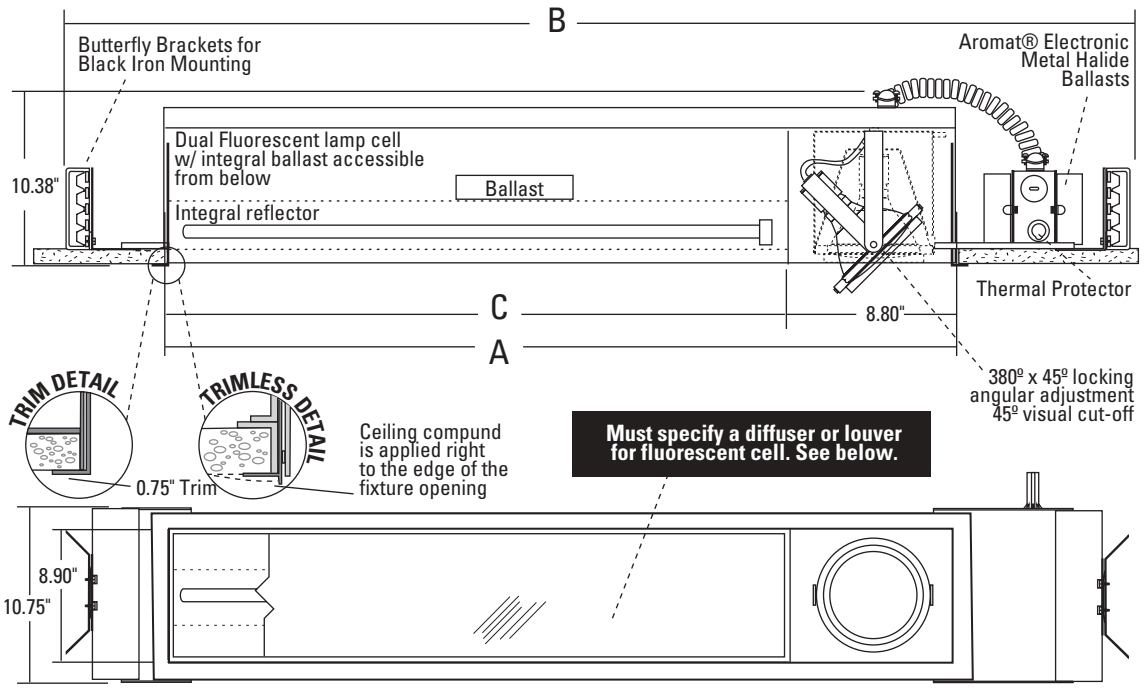

Custom configurations are available with Combo Classic fixtures.
Also available with T8 fluorescent lamps. Consult RSA for details

c UL us

Fluorescent	>>	BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
Lamp Group 3	A	34.49"	34.49"	34.49"	16.99"	17.49"	18.49"	57.99"	69.99"	45.99"	57.99"
	B	46.29"	46.29"	46.29"	28.79"	29.29"	30.29"	69.79"	81.79"	57.79"	74.79"
	C	25.50"	25.50"	25.50"	8.00"	8.50"	9.50"	49.00"	61.00"	37.00"	49.00"

ORDERING EXAMPLE: *CR338M70 | I | BX40 | BK | WH | 120*

= One PAR38 Metal Halide 70W lamp with One BIAX® 40W Fluorescent • Black Interior • White Trim • 120 volts

Optional Accessories - See RSA Combo Classic accessory page for details.

Baffle	Snoots	Louvers	Lenses

Fluorescent Diffusers and Louvers - Please specify

❑ **TWD** - Textured White Diffuser	❑ **CB1** - 2" Parabolic Louver
❑ **MPD** - Conical Prism Diffuser	❑ **CB2** - 1" Parabolic Louver

Item # / Lamp Type		Configuration	Fluorescent Lamp Cell	Interior Finish	Trim Finish	Voltage
Lamp Group 3	**CR338** - PAR38 120V	**I** - One Halogen or Metal Halide lamp cell with One Fluorescent lamp cell	**BX40** - 40W BIAX®	**BK** - Black	**BK** - Black	**120** - 120 Volts
	CR338M70 - PAR38MH 70W		**BX50** - 50W BIAX®	**WH** - White	**WH** - White	**277** - 277 Volts
	CR338M100 - PAR38MH 100W		**PLL80** - 80W PL-L	**S** - Silver	**S** - Silver	
			PLT26 - 26W PL-T	**PT** - Custom	**PT** - Custom	
			PLT32 - 32W PL-T		**TR** - Trimless	
			PLT42 - 42W PL-T			
			T528 - 28W T5			
			T535 - 35W T5			
			T5HO39 - 39W T5HO			
			T5HO54 - 54W T5HO			

T8 lamps also available

SPECIFY -	____	I	____	____	____	____

RSA LIGHTING®

RSA LIGHTING LLC 9660 - 9700 TOPANGA CANYON BLVD. CHATSWORTH CA. 91311
TOLL FREE: 800-356-3030 • 818-349-3030 • FAX: 818-349-3031 • www.rsalighting.com
©2003 RSA Lighting LLC All Rights Reserved • Specifications subject to change without notice.